

Installation Instructions

Warranty No: _____
Please Keep this for warranty

M12W Marine LIGHTS MODEL OPERATING AND SAFETY INSTRUCTIONS

Congratulations, on your purchase of one of the most advanced LED leakproof sealed ceramic technology lights, in the world today. Your Next Generation M12W marine lights, will provide you with years of trouble free use and enjoyment. The M12W is fully sealed leak-proof technology has been proven internationally for many years. Since your new M12W is consumes less power, maintenance free you need never change a globe in your Dock, Boat, and Jet Ski.

Please take a few minutes to read and observe the following installation and safety information.


M12W single colour is 12V AC/DC volts, RGB colour is 12V DC volts only, unless specifically stated.

WARNING:


1. Our Underwater LED Lights are extremely bright, please DO NOT look directly at the light as it may damage your eyes.
2. M12W MUST switch on under the water.
3. Accessories included as below:



30mm Stainless steel
screw x 2

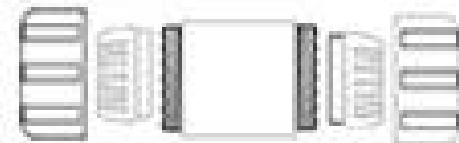

Underwater
connector x 1

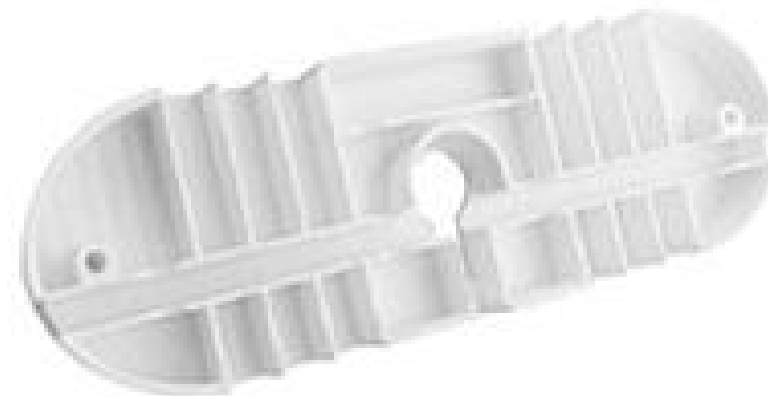

Silicone mounting foot x 1



M12 marine LED lights x 1


RISK OF ELECTRICAL SHOCK OR ELECTROCUTION

This underwater lights fixture must be installed by a licensed technician or certified electrician serviceman in accordance with all applicable local codes and ordinances. Improper installation may create an electrical hazard which could result in death or serious injury to users, installers or others due to electrical shock and may also cause damage to property.

DO NOT connect incorrect voltage or you may damage your lights and invalidate the warranty.

All Marine lights **MUST** turn on under the water only.

INSTALLATION INSTRUCTIONS

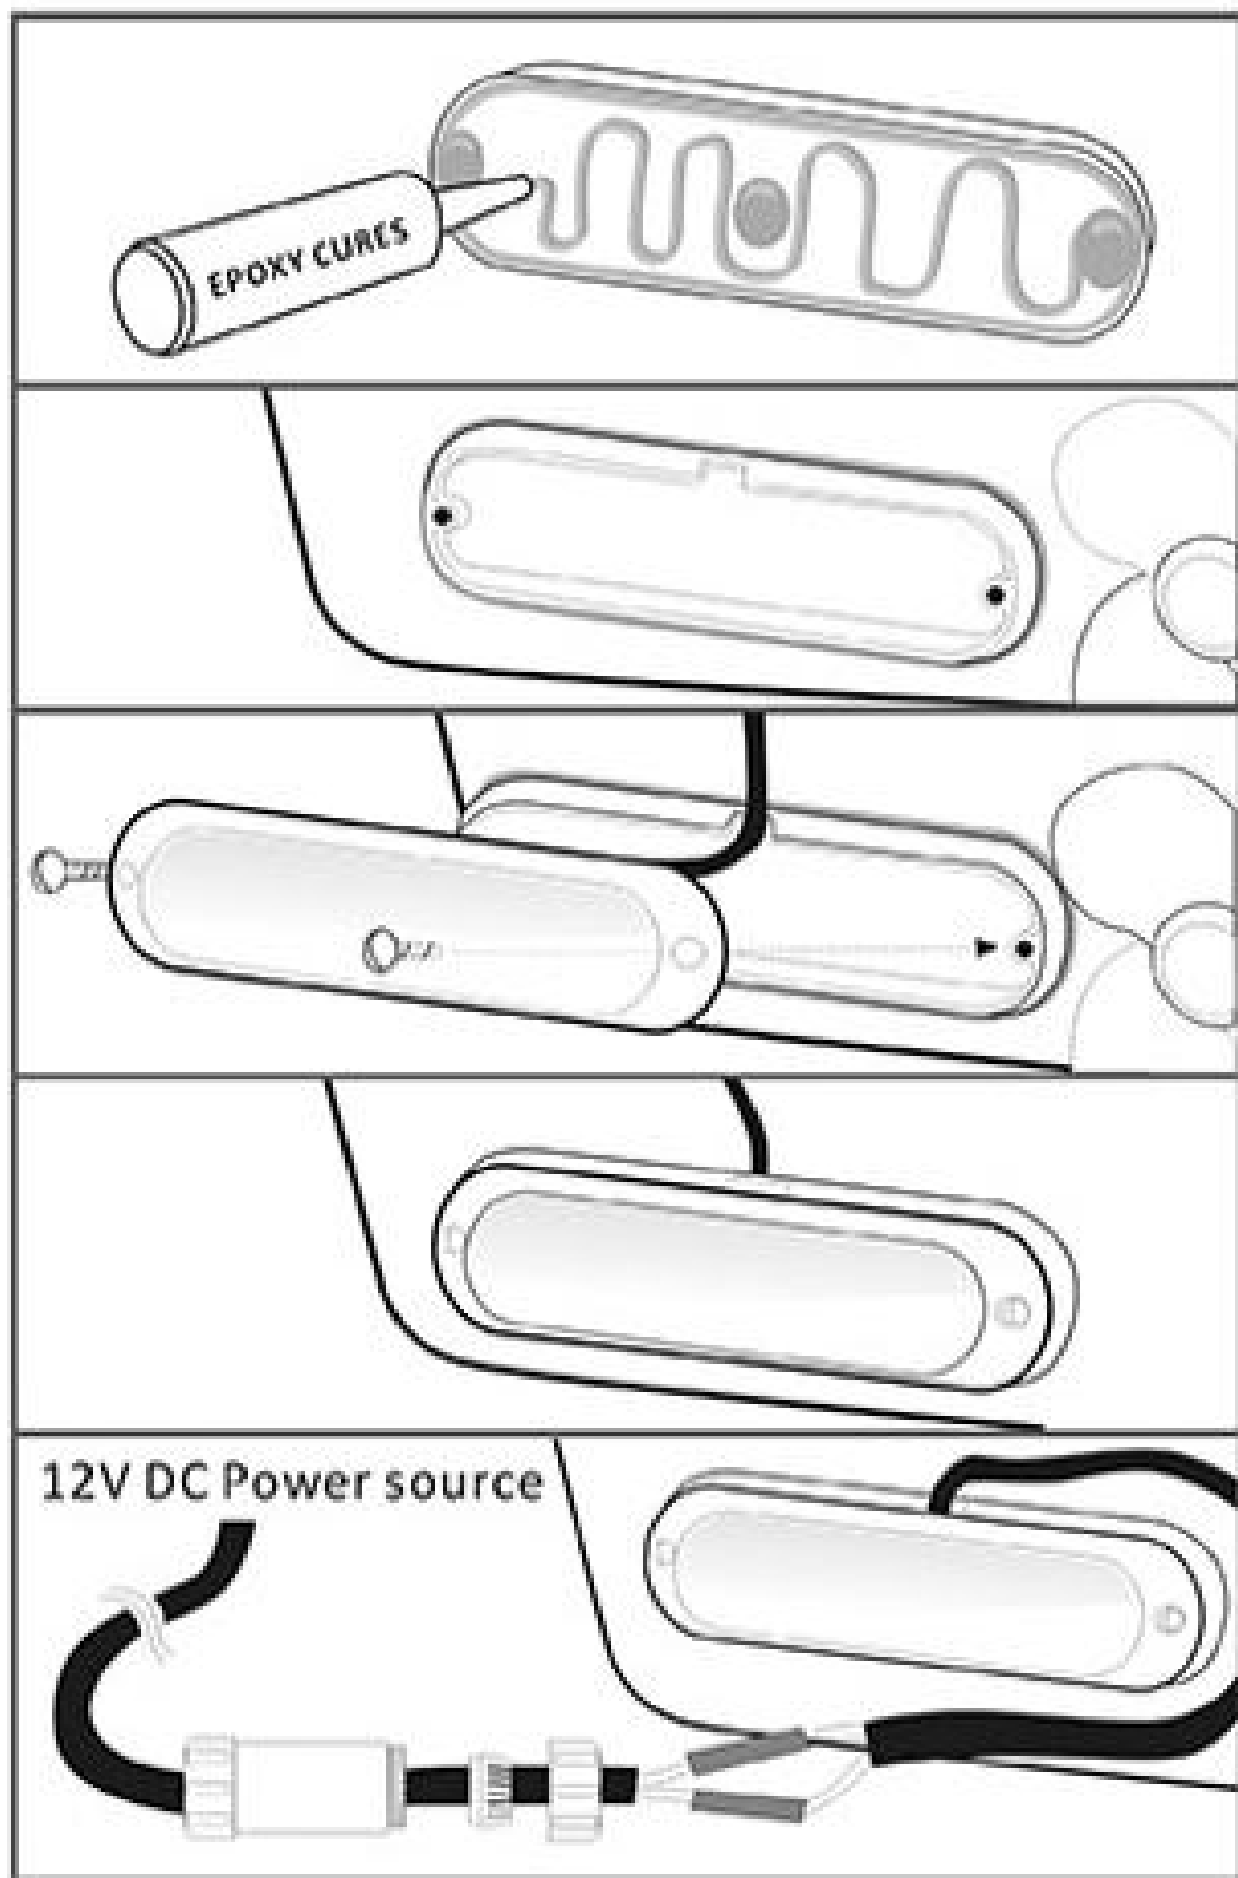

1. Installation surface **MUST** be dry and clean.
2. Select mounting location and fill grooves in the back of the mounting foot with a marine grade silicon sealant.
3. Place in position and let set for 24hr before attaching the lights
4. Wipe and excess silicone way with a rag.
5. Once the mounting foot is in position and has cured , attach the light and run the cable to the 12V DC fused power source .
6. Extend the cable if required with the underwater connector provided.
7. M12W draws 1A at 12volts AC/DC power
8. The Mounting location **MUST** be a flat surface. (Fig 2)
9. Connect the M12W RGB to the Wifi / DMX device.
The cable included 4 wires
Blue wire for blue light
Green wire for green light
Red wire for red light
Yellow wire for common
8. M12W RGB can use different Wifi & DMX devices

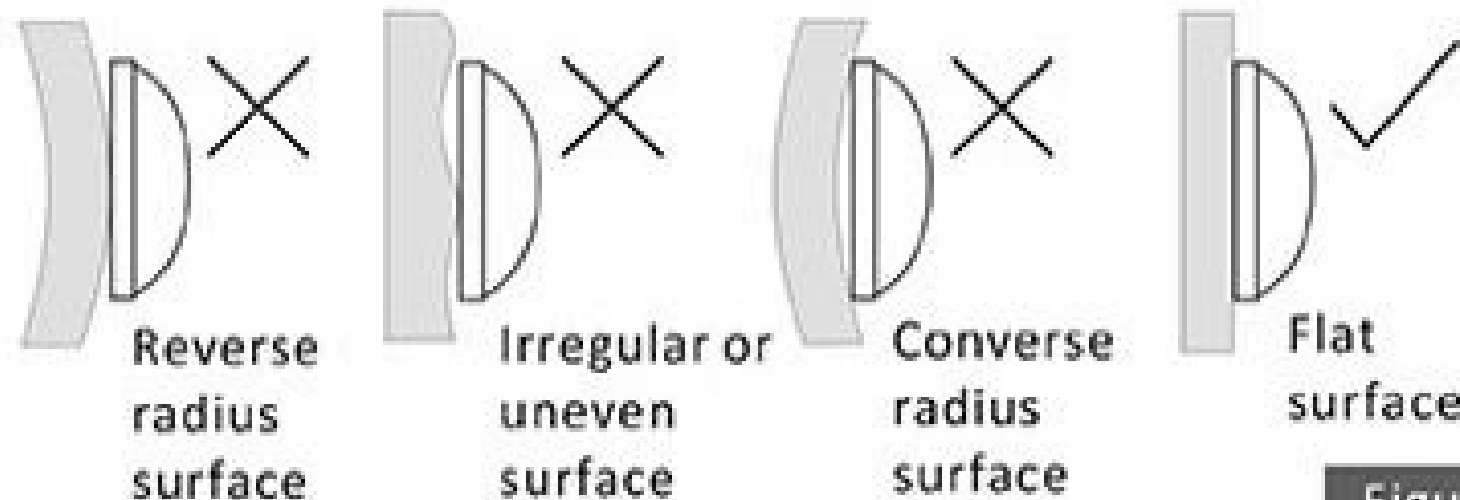


Figure 2